



VHF AND UHF TRANSCEIVERS

IC-F51

(VHF Transceiver)


IC-F61

(UHF Transceiver)

Waterproof

1m depth for 30 minutes

Intrinsically safe
versions available

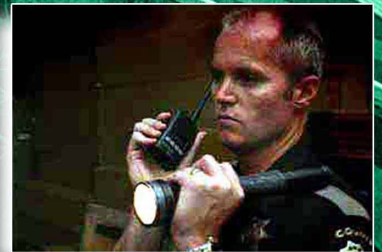

Rugged

MIL-STD 810

BIIS 1200
Compatible

Photo includes optional speaker-microphone, HM-138.



Superior Water Supports De

Firefighters, Police, Security
unique challenges, but all ha
nications. Icom's IC-F51/F6
easy to use. Rain or shine,
ment.

Dust and Waterproof protection equivalent to IP67*

The gasket sealed waterproof housing provides superior dust and water-proof** protection, equivalent to IP67. Reliable and dependable use in harsh conditions under water or dust, make the IC-F51 /IC-F61 the radio for all situations.



* The IC-F51/F61 is equivalent to IP67 of the corresponding international standard IEC 529 (1989). ** 1m depth for 30 minutes.

Built-in Tone signaling

Use the built-in CTCSS, DTCS, 2-Tone and 5-Tone capability to set up your own talk groups and quiet stand-by when other groups are talking. You can also set up selective calls to individuals or control a repeater.

Multiple 5-Tone

Up to 8 5-Tone codes can be decoded on a single memory channel. This is perfect for professionals who require multiple district paging on one channel. When a matched tone is received, the following items are programmable for each code.

- Bell icon
- Answer back
- Stun
- Beep sound
- Auto transmit
- Scan
- ID decode
- Emergency cancel

VHF AND UHF TRANSCIVERS

IC-F51

VHF Transceiver

IC-F61

UHF Transceiver



Waterproof Protection Demanding Communication

Police, Fire, and Public utilities. Each profession has its own requirements. They all have one thing in common: the need for reliable communication. ICOM offers a compact waterproof, MIL STD package, that's rugged. This radio keeps you in contact in nearly any environment.



Li-Ion battery pack

The large capacity 1950mAh (typ.) Lithium-Ion (Li-Ion) battery pack, BP-227 provides a practical 10 hours* of operating time. Li-Ion batteries allow flexible charging and have almost no memory effect.


* Typical operation Tx:Rx:Stand-by=5:5:90

Up to 7 programmable buttons

The [P0]–[P3], [Red] and [Up], [Down] buttons are programmable to meet specific needs. The [Red] button on the top panel can be assigned as an emergency trigger.

Alphanumeric display

The 8-character alphanumeric display shows channel, bank, tone code and scanning channel names on the display. 7 operational icons on the sub-line show various status at a glance.



Upper and lower case characters available.

Wide range coverage and large channel capacity

The IC-F51 covers 136–174MHz and the IC-F61 covers 400–470MHz in one version. The 128 memory channels with 8 memory banks allows you to divide and store a variety of channels from local to wide area network channels. Wide, middle and narrow* channel bandwidth is programmable to each channel.

(* Programmable 25/12.5kHz or 20/12.5kHz Ch.)

Compact body

56(W)×97(H)×36.4(D) mm compact body with durable, dependable construction, has been tested to MIL standard specifications. The compact design fits comfortably in your palm, and is easy to carry around.

Built-in voice scrambler

The IC-F51/F61 has a built-in inversion type voice scrambler in all versions. When a more secure system is required, versions with a rolling type voice scrambler* equivalent to the UT-110 are available.

* Built-in, optional unit not required.

BIIS 1200 Compatible

The following selective calling and data features are available with the BIIS system.

- 32 abbreviated call memories
- 7 group IDs
- 24-status Messages
- 8-character SDM (Short Data Message)
- RS-232C interface
- Position data transmission with optional HM-170GP

ATEX Intrinsically safe version*

An intrinsically safe version conforming to the 94/9/EC ATEX Directive, is suitable for use in hazardous areas where flammable gasses, liquids or combustible dusts are used.

* See specification page for applied classes.

Other features


- Built-in audio compander
- 8 DTMF autodial memories
- Normal and priority scans
- 2 step power saver
- Optional AA alkaline battery case, BP-226
- Optional GPS speaker microphone, HM-170GP
- Busy, repeater lockout functions
- Power ON password, and more...

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.



BP-226 BATTERY CASE: AA (LR6)×5 alkaline cells. BP-226 is water-resistant, equivalent to IPX4.
* BP-226 is **not approved** as intrinsically safe.
BP-227/BP-227AXD Li-Ion BATTERY PACK Provides 10 hours operating time* (approx.). BP-227AXD is for ATEX gas and dust approval version. Operating temp. range: BP-227: -20°C to +60°C. BP-227AXD: -20°C to +55°C. * Tx: Rx: standby=5:5:90.



BC-152 DESKTOP CHARGER + BC-147SA/SE AC ADAPTER Regularly charges the BP-227 in 9–10 hours.



BC-119N DESKTOP CHARGER + AD-100 CHARGER ADAPTER + BC-145SA/SE/SV AC ADAPTER Rapidly charges the BP-227 in 2–3 hours.



BC-121N MULTI-CHARGER + AD-100 CHARGER ADAPTER + BC-157 AC ADAPTER Rapidly charges up to 6 battery packs (Six AD-100s are required) in 2–2.5 hours.
OPC-656 DC POWER CABLE; For use with the BC-121N. (12–20V DC required).



HM-168 : Compact type speaker-microphone. Equivalent to IPX7.
HM-169 : Rugged type speaker-microphone. Equivalent to IP57.
HM-170GP : GPS speaker-microphone for BIIS mode. Equivalent to IP57.
HM-138 : Full sized speaker-microphone. Equivalent to IPX7. HM-138 is approved as intrinsically safe.



MB-86 : Swivel type belt clip.
MB-98 : Alligator type. Same as supplied.
MB-96N : Swivel type belt hanger.
MB-96F : Fixed type belt hanger.



CP-23L : CIGARETTE LIGHTER CABLE
OPC-515L : DC POWER CABLE
For use with the BC-152 or BC-119N. (12–16V DC required)

* These cables are **not approved** as intrinsically safe.



OPC-966 : RS-232C interface cable for connecting with a PC.

ANTENNAS
FA-S24V: 136–150MHz (Blue ring)
FA-S59V: 150–174MHz (Red)
FA-S27U: 400–470MHz (Green)
FA-S56U: 450–520MHz (Red)
* The FA-S24V and FA-S56U are **not approved** as intrinsically safe.

STUBBY ANTENNAS
FA-S62VS: 150–162MHz (Red)
FA-S63VS: 160–174MHz (Green)
FA-S57US: 450–490MHz (Red)

SPECIFICATIONS

GENERAL	
• Frequency range	: IC-F51 136–174MHz IC-F61 400–470MHz
• Number of Channels	: Max. 128 channels/ 8 banks
• Channel spacing	: 12.5/20/25kHz
• Antenna impedance	: 50Ω (SMA Type)
• PLL channel step	: IC-F51 2.5/3.125kHz IC-F61 5/6.25kHz
• Power supply requirement	: 7.2V DC
• Current drain (approx.)	: Transmit at 5W 1.5A (IC-F51) at 4W 1.5A (IC-F61) at 1W 0.7A (IC-F51) at 1W 0.8A (IC-F61) Receive AF max. 300mA Stand-by 85mA
• Operating temperature range	: -25°C to +55°C ATEX version -20°C to +55°C
• Dimensions (W × H × D) (projections not included)	: 56 × 97 × 36.4mm
• Weight (approx. :)	: 280g (With BP-227) 290g (With BP-227AXD)

TRANSMITTER	
• Output power	: 5.0W/4.0W (IC-F51/F61) ATEX version 1.0W/1.0W (IC-F51/F61)
• Modulation system	: Variable reactance frequency modulation
• Max. frequency deviation	: ±5kHz (wide) ±4kHz (middle) ±2.5kHz (narrow)
• Frequency error	: ±2.5ppm
• Spurious emissions	: 0.25μW (and below 1GHz) 1.0μW (above 1GHz)
• Modulation limiting	: 60–100% of Max. deviation
• Audio harmonic distortion	: 3% typ. (AF 1kHz, 40% deviation)
• Adjacent channel power	: 70dB Min. (wide, middle) 60dB Min. (narrow)
• External MIC impedance	: 9-pin multi connector/2.2kΩ

ATEX INTRINSICALLY SAFE TYPE APPROVAL



There are versions that conform to ATEX gas and dust (II2GD) approval. Ask your dealer for details.

The approved rating is
Gas: II2GD Ex ib IIA T3
Dust: II2GD Ex tD A21 T160°C IP67
Special conditions for use: Must be used with **BP-227AXD**
Approved accessories: Speaker-microphone HM-138
Antenna FA-S59V, S27U, Stubby antenna FA-S62VS, S63VS, S57US
Belt clip MB-98, MB-86, Leather belt hanger MB-96F

* Note for IC-F51/F61 ATEX Non-Dust (II2G) version users, please use only the **BP-227AX** battery pack with the IC-F51/F61 ATEX Non-Dust version.

RECEIVER	
• Sensitivity	: -4dBμV typ. (emf, at 20dB SINAD)
• Squelch sensitivity	: -4dBμV typ. (emf, at threshold)
• Adjacent channel selectivity	: 75dB typ. (wide) 73dB typ. (middle) 65dB typ. (narrow)
• Spurious response	: 70dB
• Intermodulation	: 67dB typ.
• Hum and noise (With CCITT filter)	: 55dB typ. (wide) 53dB typ. (middle) 50dB typ. (narrow)
• Audio output power	: 0.5W typ. at 5% distortion with an 8Ω load
• External SP connector	: 9-pin multi connector/8Ω

Measurements made in accordance with ETS 300-086.
All stated specifications are subject to change without notice or obligation.

Applicable U.S. Military Specifications

Icom makes rugged products that have been tested to and passed the following MIL-STD requirements and strict environmental standards.

Standard	MIL 810F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Rain	506.4	I, III
Humidity	507.4	-
Salt Fog	509.4	-
Dust Blowing	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

Supplied accessories: (May differ according to version)

- Antenna (Length may differ according to version)



▲ VHF antenna



▲ UHF antenna



• Alligator-type belt clip, MB-98



• Battery pack

Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302

Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.

2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: <http://www.icom.co.nz>

Icom (UK) Ltd.

Blacksale House, Altira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0)1227 741741
Fax: +44 (0)1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icomeurope.com
URL: <http://www.icomeurope.com>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejonn des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland
Phone: +48 (58) 550 7135
Fax: +48 (58) 551 0484
E-mail: icompolkska@icompolkska.com.pl
URL: <http://www.icompolkska.com.pl>

Your local distributor/dealer: